INSTALLATION MANUAL

Installation hanging bracket - Bracket 1

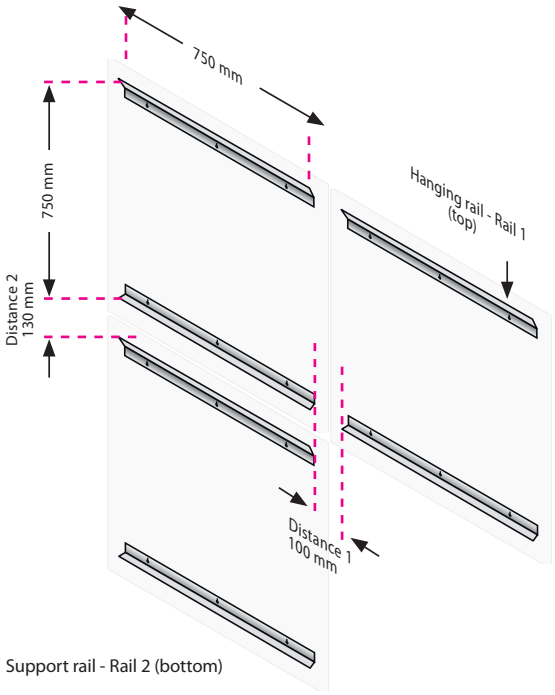

Support rail - Rail 2 (bottom)

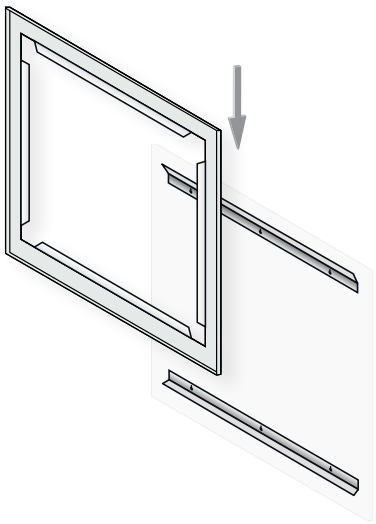

Cross-section

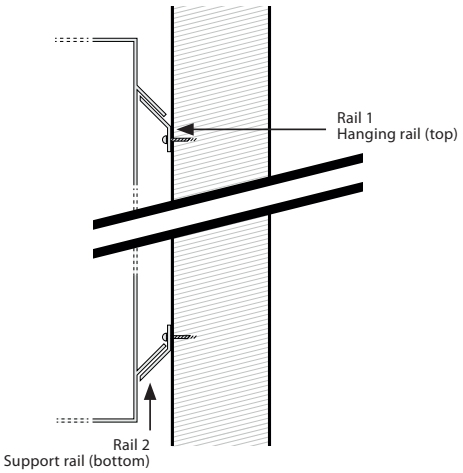

TWISTER

Acoustic wall panel system – Designed by Vvorks

INSTALLATION MANUAL

Rail 1	Fitted to the wall with washers between the wall and rail
Rail 2	Comes with double-sided tape which is removed once all adjustments have been made
Distance 1	Distance between the hanging rails: – rail 1: 100 mm
Afstand 2	Distance between lower edge of support rail 2 and top of hanging rail 1: 130 mm

INSTALLATION STEP BY STEP

Step 1:
Install rail 1 - ensure hanging rails are horizontal.
If the wall is not straight, adjustments can be made via the three screw-holes.

Step 2:
Install rail 2.

Step 3:
Hang Twister from below and up, making any necessary adjustments by loosening the screws and adjusting the rail.

Step 4:
Remove double-sided tape and hang Twister.

FRASTER